

Description:

Easy rainwater filter with integrated dirt retention basket for installation into the ground before the rainwater tank.

The dirt basket made of plastics can be removed easily with the removal handle.

The 3P Garden Filter is suitable for equipments of watering the garden and for sites in which the rainwater has to be infiltrated. That means where no connection with a sewer is possible for discharging the rainwater runoff.

The two upper adapters DN 100 can be used as inlets or also optionally as an emergency overflow.

The lower adapter is used as inlet to the rainwater tank. There you can also install a calmed inlet.

Connection capacity:
for roof areas up to 213 m²

All connections: DN 100


The cleaned water can be used for garden watering

The filter has to be cleaned depending on the contamination several times during the year



How it works:

1. Rainwater is led through the adapter DN 100
2. The dirt is detained in the dirt retention basket made of plastics, the basket has to be cleaned if necessary
3. One inlet DN 100 can also be used as an emergency overflow
4. Cleaned water flows over the inlet DN 100 into the rainwater tank
5. Use of a calmed inlet is possible

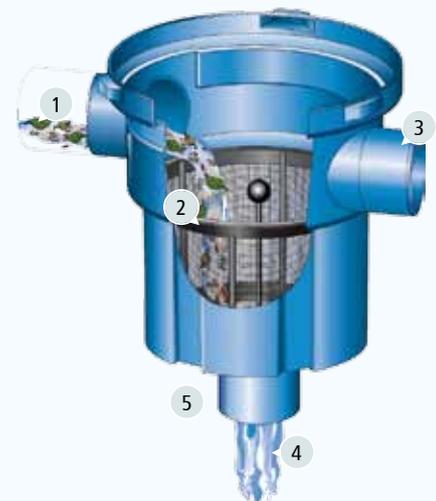

Technical Data:

Filter according to DIN 1989-2, Typ B

Connection inlet: DN 100

Outlet to storage: DN 100

Emergency overflow or additional inlet:
DN 100



Connection capacity for roof areas: 213 m²


Material housing: Polyethylene

Material filter basket: Polyethylene
Diameter: 305 mm, Height: 245 mm

Mesh size: 1 mm

Weight: 2,2 kg

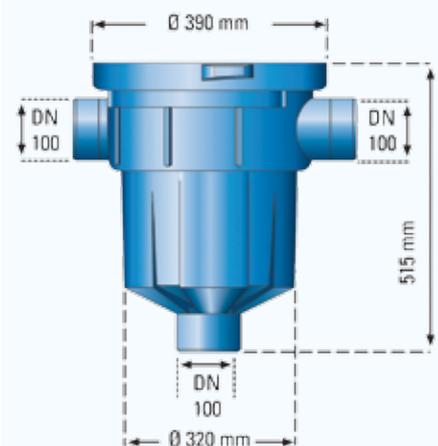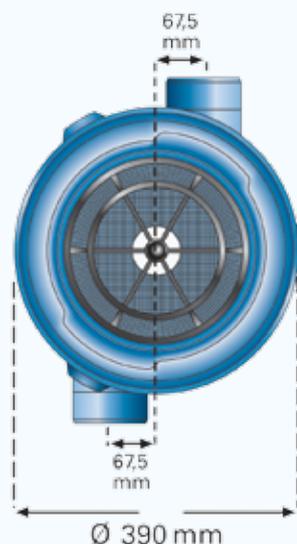


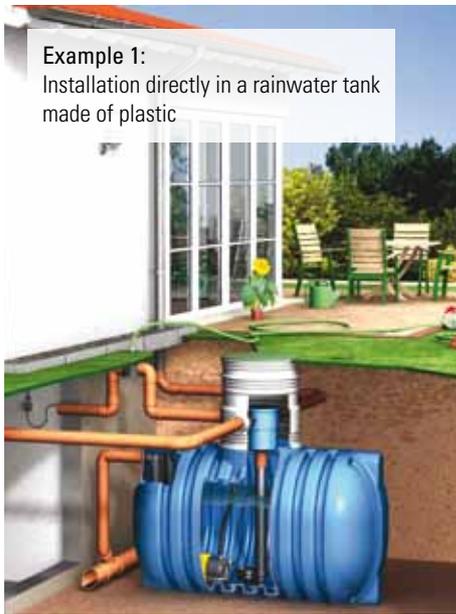

Example 1:
Installation directly in a rainwater tank made of plastic



Example 2:
Installation directly in a rainwater tank made of concrete

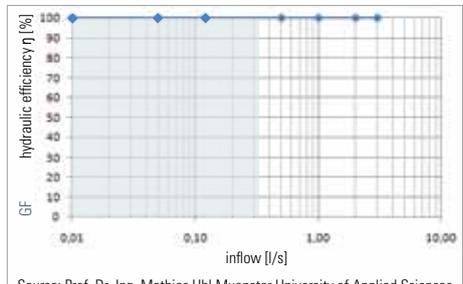

Source: Prof. Dr.-Ing. Mathias Uhl Muenster University of Applied Sciences

80% of the average intensity of rainfall in Germany is under 15 l/(sxha), resulting a volume flow rate of 0,32 l/s with a roof area of 213 m².

Diameter of tube	maximum flow rate	connectable area max. 200 l/(sxha)	connectable area max. 300 l/(sxha)
DN	l/s	m ²	m ²
100	6,4	320	213

Text for invitation of tenders:

Pos.	Quantity	Article	Price in €
1.1	_____	3P Garden Filter Filter for installation in tanks, pre-shafts or directly into the ground before the tank Inlet rainwater: 2 x DN 100, Outlet to storage: DN 100 Filter insert: plastic basket, Mesh size: 1 mm, with removal handle Connection capacity according to DIN 1986: for roof areas up to 213 m ² at a rainfall intensity of 300l/(sxha)	_____
1.2	_____	3P Telescopic extension for 3P Garden Filter Plastic (PE) shaft for the installation of 3P Garden Filter 3P Telescopic extension can be directly connected with the 3P Garden Filter with a bayonet fitting Height: adjustable until 75 cm	_____

Accessory 1:

3P Telescopic extension for 3P Garden Filter
Art.-Nr. 1000560

Accessory 2:

3P Locking lid for 3P Garden Filter
Art.-Nr. 1000502
Color: blue



Packing unit 3P Garden Filter:

m³-Carton: 12 pieces
Pallet: 24 pieces