

### Description:

Overflow Siphon with odour trap and suction of the surface water

With screw-threaded union connector DN 100, ideal for concrete tanks

### Technical Data:

Dimensions: 540 x 190 x 270 mm

Material: Polyethylene

Weight: 1,1 kg

### Packing unit 3P Overflow Siphon uno for concrete tanks:

Carton 1150 x 790 x 1065 mm: 36 pieces

Pallet: 72 pieces

## 3P Overflow Siphon uno for concrete tanks

Art.-Nr. 4000265



### Description:

Overflow Siphon with odour trap and suction of the surface water

With screw-threaded union connector DN 100, ideal for plastic tanks

### Technical Data:

Dimensions: 660 x 190 x 270 mm

Material: Polyethylene

Union connector: 110 mm mit O-Ring

Weight: 1,1 kg

### Packing unit 3P Overflow Siphon uno for plastic tanks:

Carton 1150 x 790 x 1065 mm: 36 pieces

Pallet: 72 pieces

## 3P Overflow Siphon uno for plastic tanks

Art.-Nr. 4000260



### Description:


Provides a calmed inlet for rainwater in larger rainwater tanks. Dirt particles denser than water sink to the bottom of a rainwater tank and form a sediment layer, which demonstrably has a positive influence on the stored rainwater. Rainwater tanks with a sediment layer do have clearer water. The Calmed Inlet prevents the incoming rainwater from disturbing this settled sediment layer, keeping the water free of dirt particles. The oxygen keeps the water fresh by preventing anaerobic decomposition. The calmed inlet is called the second cleaning step inside the rainwater tank.

### Technical Data:

Material: Polyethylene with connection possibilities for pipes: DN 100 / DN 125; Weight: 0,5 kg

### Packing unit 3P Calmed Inlet

DN 100 / DN 125: Carton 790 x 575 x 700 mm: 36 pieces; Pallet: 216 pieces

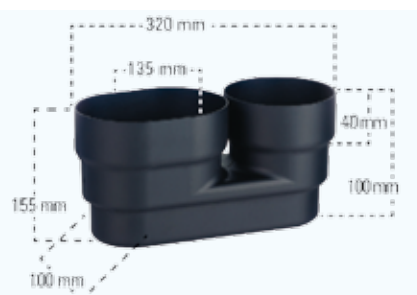

## 3P Calmed Inlet DN 100 / DN 125

Art.-Nr. 4000100

